


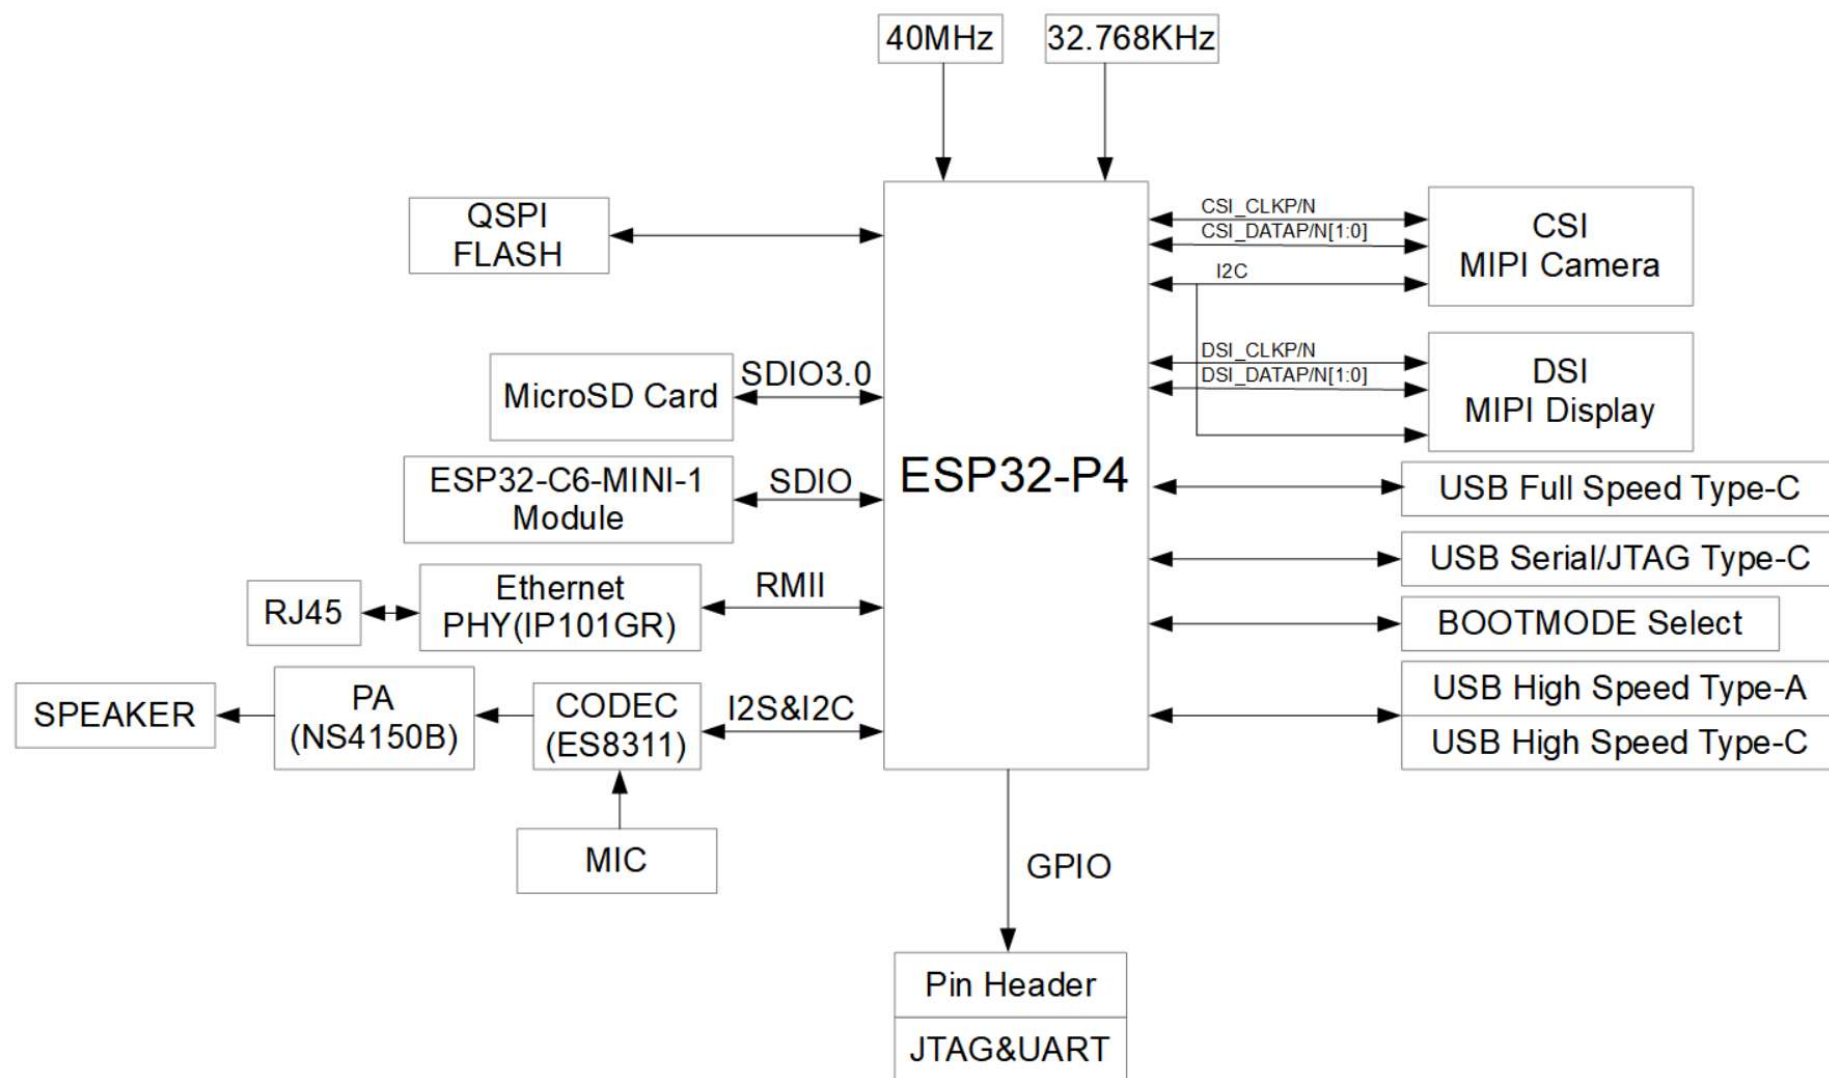
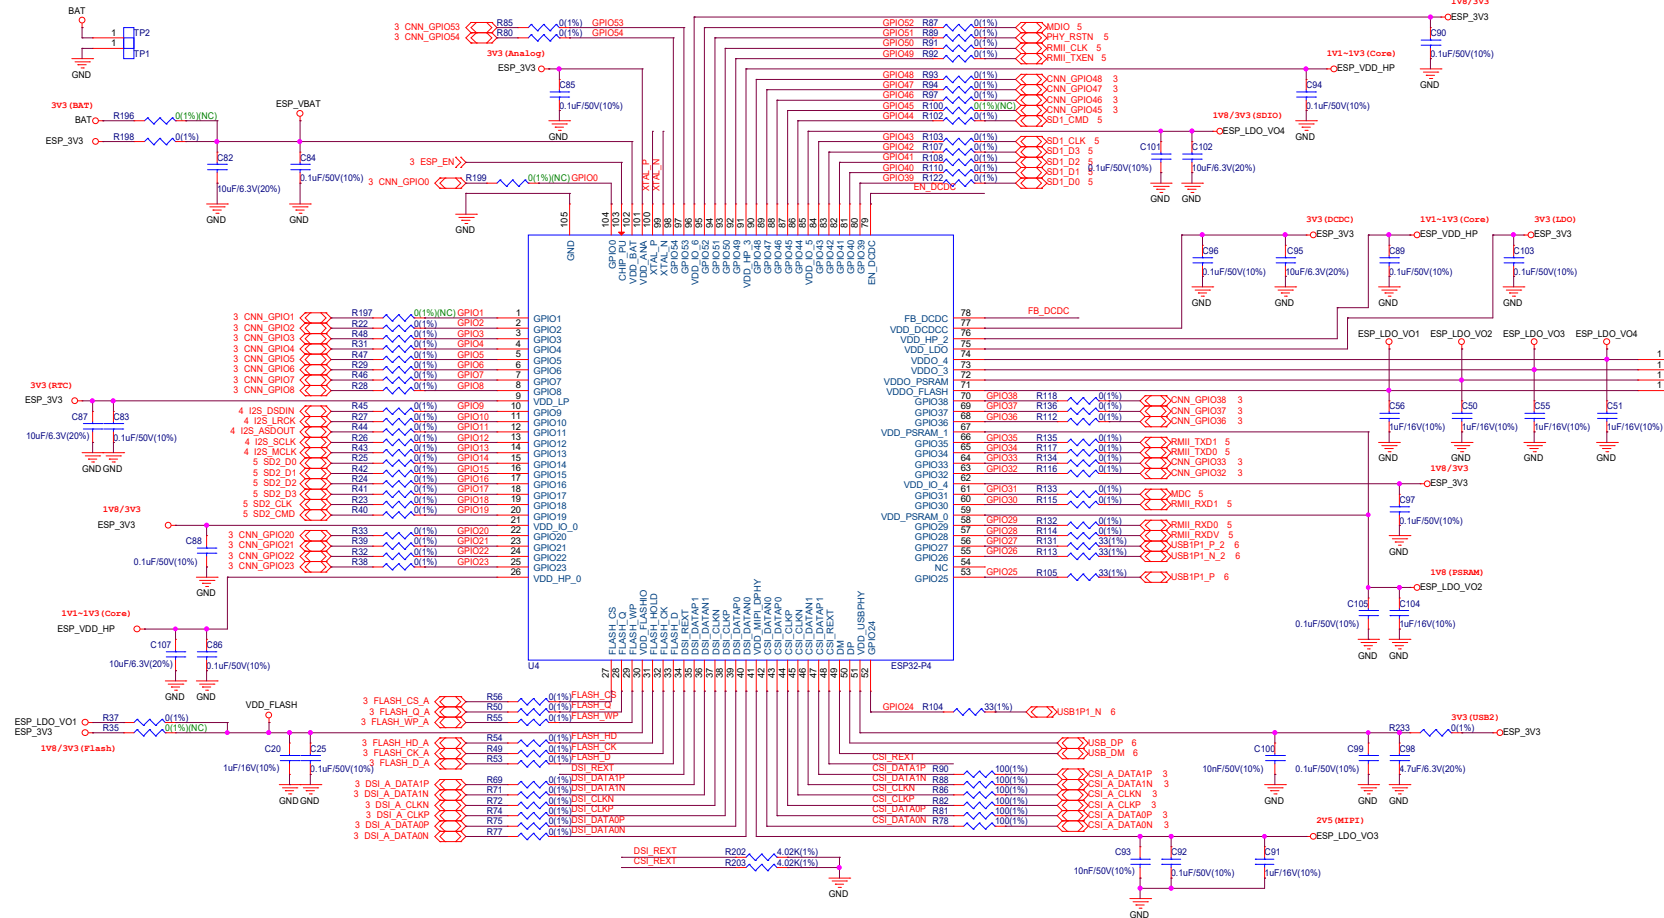

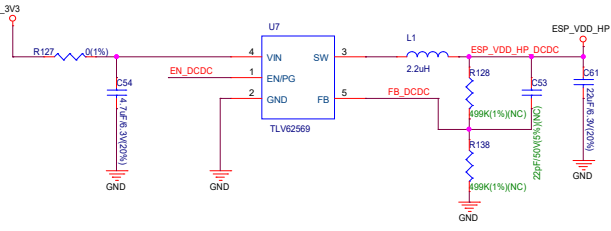


Design Block:




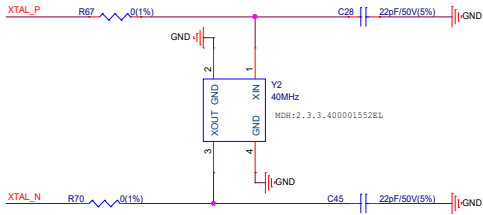


FLASH:

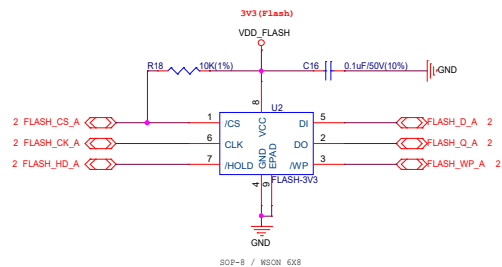


Boot Strapping Pins:

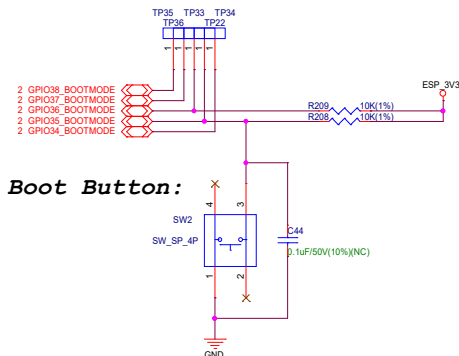


Reset Button:




Boot Button:




Pin Header For GPIOs:

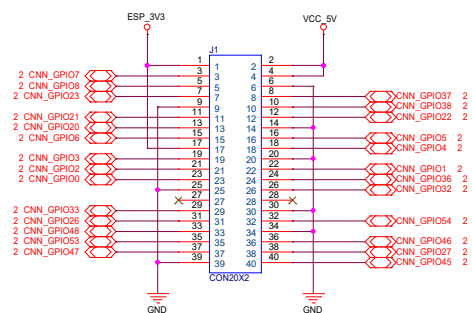


CSI Connector:

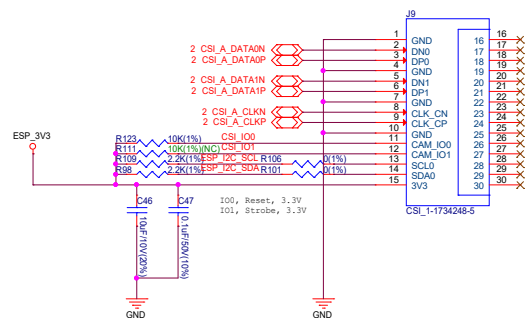


DSI Connector:

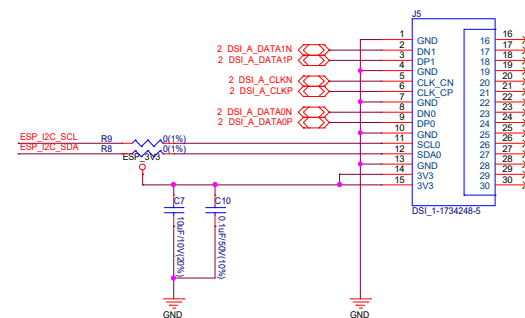


Codec :

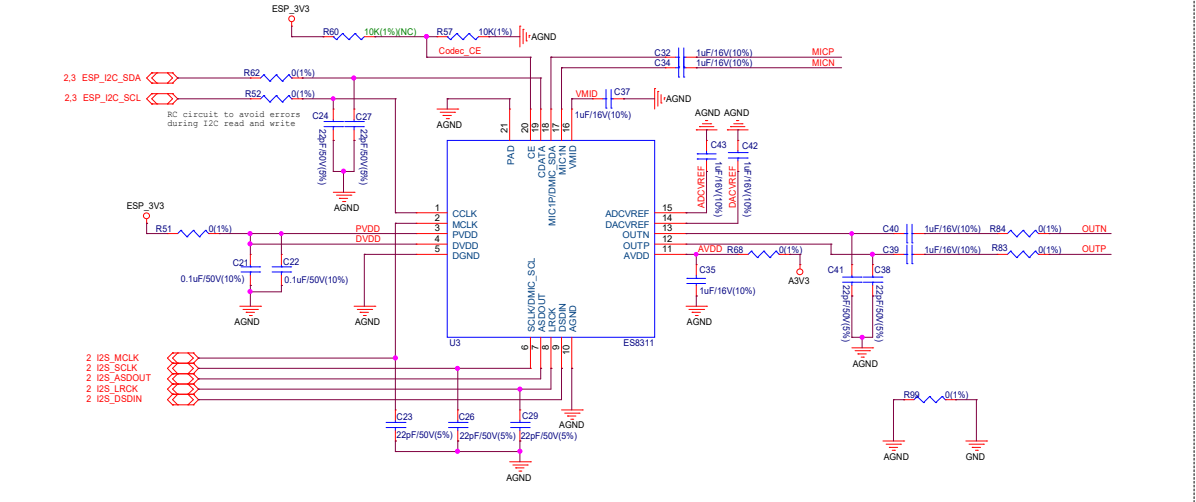


MIC :

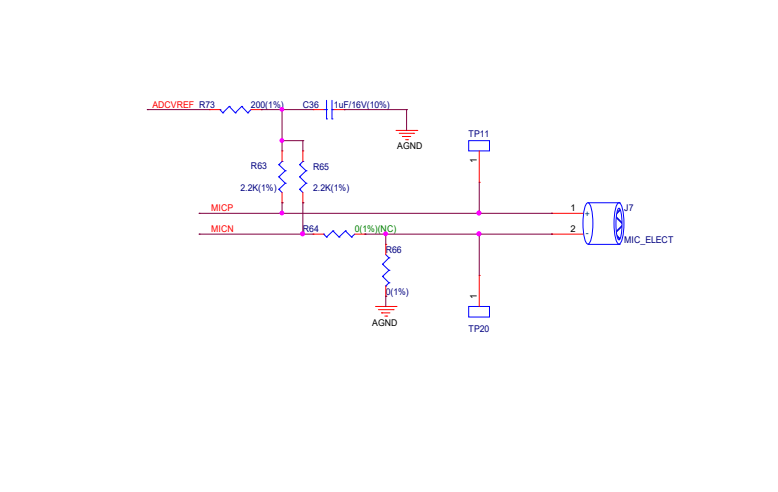


PA&SPEAKER :

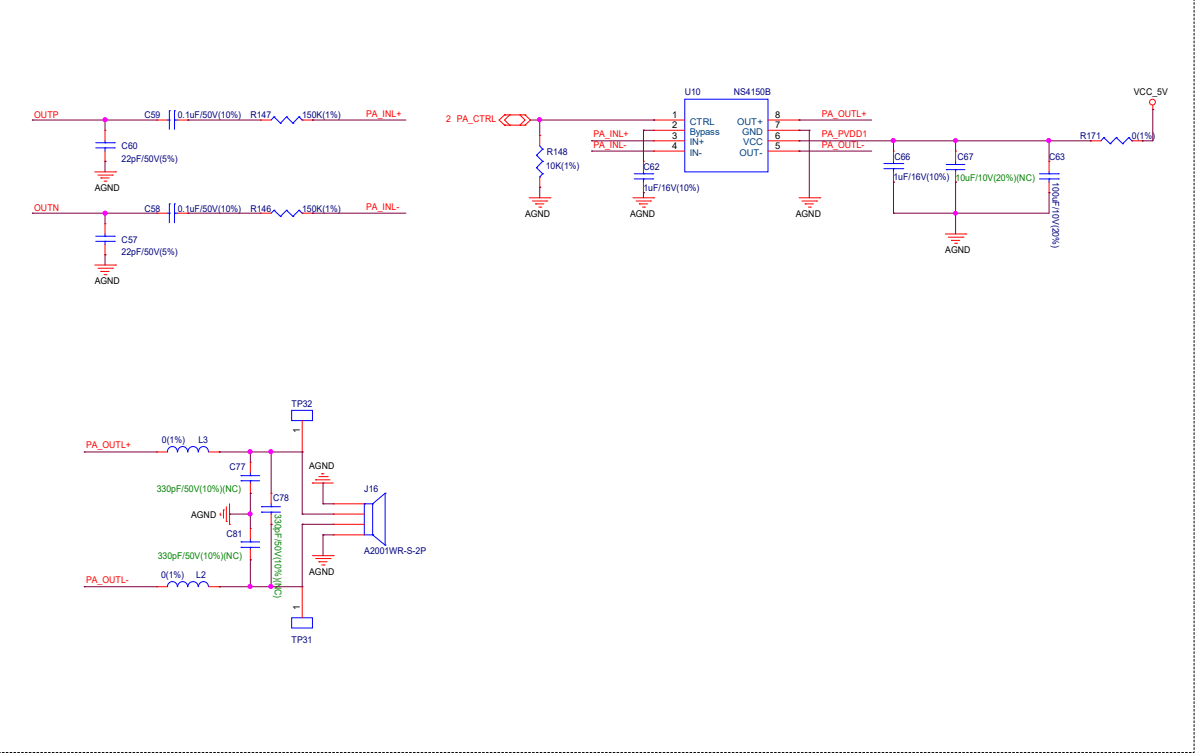


3.3V LDO For AVDD:

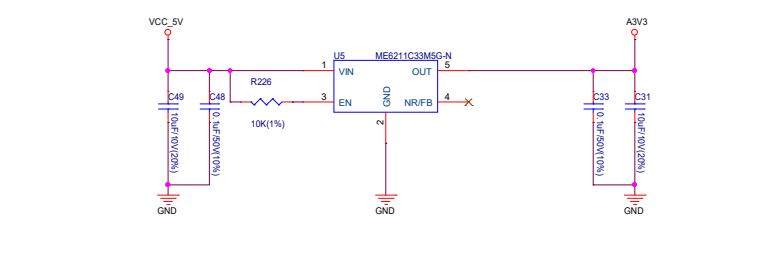


USB High Speed & Power in:

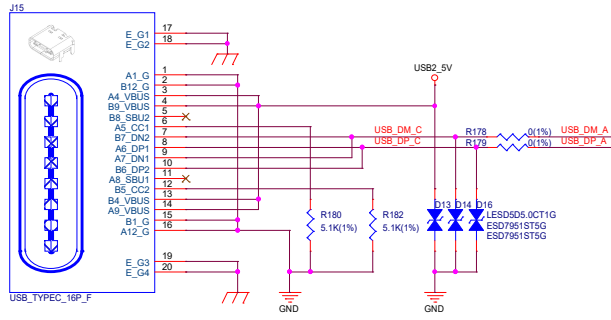


USB Serial/JTAG & Power in:

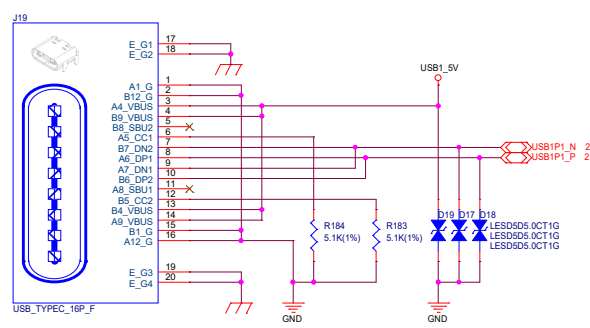


USB Full Speed Slave & Power in:

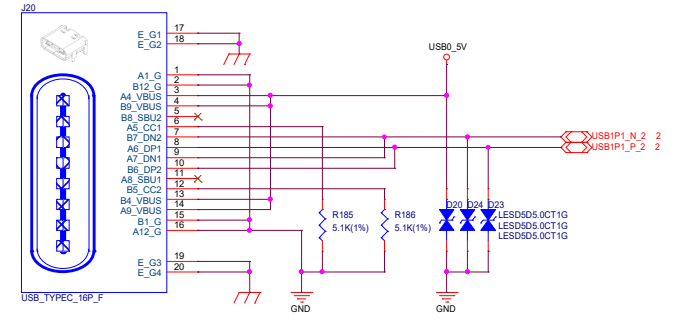

Ideal Diodes:

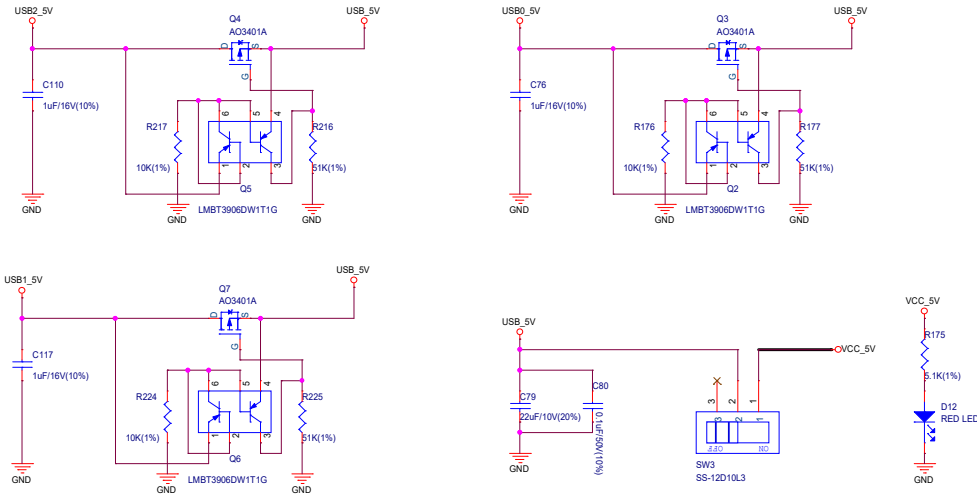

3V3 DC-DC:

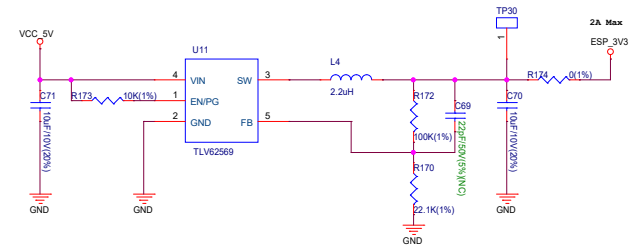

USB High Speed Host:

Jumper@J10

